



PRODUCT CATALOG






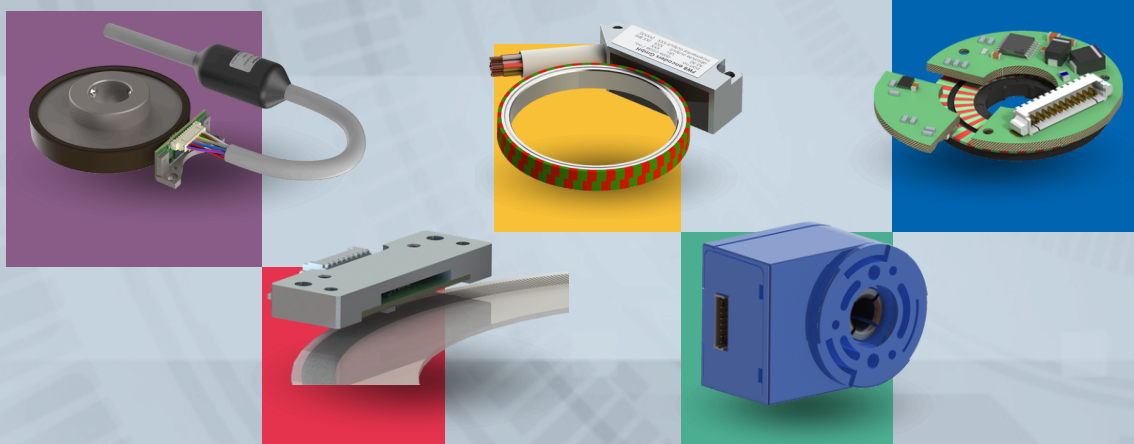


Table of contents

»		Hollow shaft encoder optical incremental 3 magnetic absolute 4 magnetic incremental 4
»		Shaft encoder optical incremental 5 magnetic incremental 5
»		KIT encoder systems optical absolute 6 magnetic absolute 6 optical incremental 7
»		Linear encoder optical absolute 7 optical incremental 7 magnetic absolute 7
»		Encoder discs and encoder scales 8
»		Customised solutions 9
»		Areas of application 10
»		Our highlights 25/26 11

We successfully set production technology & innovation in motion.



Our team



Our encoders

PWB encoders GmbH is a German company specialising in the development, production and distribution of high-quality miniature encoders, code wheels, code strips and customised motor encoder systems.


Encoders from PWB provide precise measurement of rotational speed, velocity and position, serving as sensors for motor feedback and linear motion detection. Key application areas include electric drives in medical technology, robotics, packaging, measurement systems and a wide range of automation solutions.

Our strength lies in the professional development of both standard and customised products, as well as in our outstanding customer service.

If our standard solutions do not fully meet a specific application, we gladly collaborate with our customers to develop tailor-made products that perfectly align with their requirements and expectations.



Our clean room

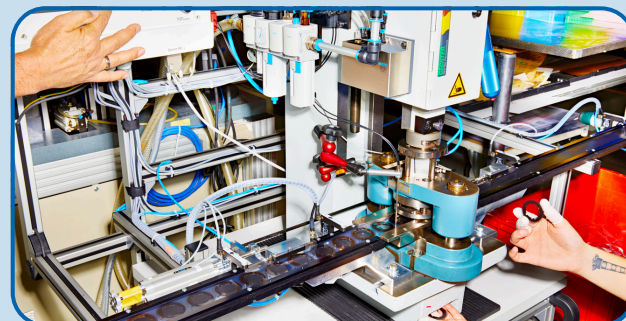

Our production

PWB - precision works better


Our motivation is to integrate the latest technologies into the functionality and design of our products – tailored to the needs of diverse industries and applications. In doing so, we contribute to our customers' success, because our long-term success is only possible through theirs.

Personal, expert advice and close, collaborative partnerships form the foundation of our continuous growth.

Made in Germany – quality without compromise.

At PWB encoders, the highest quality standards are a top priority. All products are developed and manufactured in Germany and are successfully used worldwide. Our processes are continuously reviewed and improved to ensure outstanding product quality and customer service.

We are certified according to DIN ISO 9001:2015 – a standard we meet with conviction.

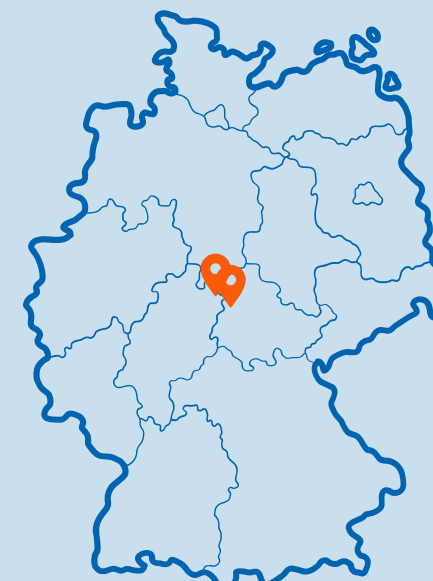

Our locations


Founded in 2009, the company is headquartered in Eisenach, Thuringia, with a development office in Berkatal, Hesse.

With expert consulting and strong team expertise, we help push the boundaries of what's possible with encoders and encoder code wheels.

About us:



Competent encoder manufacturer for customised solutions



Leading mini encoder manufacturer in Europe



European market leader for polyester film encoder discs





Privately run company



Specialist for high-end technological products




Hollow shaft encoders

optical incremental

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	AE 30	31	100 - 5000	2.0 - 8.0	2 / 3 / 4 / 6	5
	AE 30 F	31	100 - 5000	2.0 - 8.0	2 / 3 / 4 / 6	5
	AE 30 VX	31	100 - 5000	2.0 - 8.0	4	8 - 30
	EBG 38	38	250 - 4096	3.0 - 10.0	6	5 / 8 - 30
	ME 16	16	36 - 230	1.5 - 3.175	1 / 2	5
	ME 22	22	1 - 360	1.5 - 8.0	2 / 4	5
	MEC 22	22	500 - 2048	1.5 - 8.0	2 / 3	5
	MEC 22 HR	22	2000 - 8192	1.5 - 9.52	2 / 3	5
	MEHR 25 C	25	up to 12.000	4.0 / 6.0	6	5
	MEHR 25 H	25	up to 12.000	4.0 / 6.0	6	5
	MEHR 25 Y01	25	up to 1024	6.0	3	5 / 8 - 30
	MES 25 C	25	250 / 256	4.0 / 6.0	6 Sin / Cos	5
	MES 25 H	25	250 / 256	4.0 - 6.0	6 Sin / Cos	5

Hollow shaft encoders

magnetic absolute

Product image	Product name	Outer diameter (mm)	Resolution (Bit)	Shaft diameter (mm)	Channels	Power supply (VDC)
	AEM 30	31	up to 36	4.0 - 6.35	SSI, BiSS, SPI	5 / 8 - 24
	MEM 16 M	16	up to 45	1.5 - 3.175	SSI, BiSS, SPI	5
	MEM 22 AE	22	12	2.0 - 8.0	SSI, BiSS, SPI	5 / 8 - 30
	MEM 22 M	22	up to 38	2.0 - 8.0	SSI, BiSS, SPI	5





Hollow shaft encoders

magnetic incremental

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	MEM 16 IE	16	1 -1024	1.5 - 3.175	2 / 3	5
	MEM 20	22	64	3.0	2	5
	MEM 22 IE	22	1 - 1024	2.0 - 8.0	3 / 6	5 / 8 - 30
	MEM 25 C	25	1 - 1024	2.0 - 6.0	3	5 / 8 - 30
	MEM 25 H	25	1 - 1024	2.0 - 6.0	3	5 / 8 - 30



Shaft encoders

optical incremental

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	GEO 24	24	360	4.0	2	8 - 24
	ME 22 S	22	1 - 360	4.0 - 6.0	2	5
	MEHR 25 K	25	up to 12000	4.0 - 6.0	6	5
	MEHR 25 S	25	up to 12000	4.0 - 6.0	6	5
	MES 25 K	25	250 / 256	4.0 - 6.0	6 Sin / Cos	5
	MES 25 S	25	250 / 256	4.0 - 6.0	6 Sin / Cos	5




Shaft encoders

magnetic incremental

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	MEM 25 K	25	1 - 1024	2.0 - 6.0	3	5 / 8 - 30
	MEM 25 S	25	1 - 1024	2.0 - 6.0	3	5 / 8 - 30





KIT encoder systems

optical absolute

Product image	Product name	Outer diameter (mm)	Resolution (Bit)	Shaft diameter (mm)	Channels	Power supply (VDC)
	ABG 26	26	13 / 16 / 18	10	SSI, BiSS, SPI	5
	ABG 69	69	13 / 16 / 18	30	SSI, BiSS, SPI	5
	ABG 138	138	13 / 16 / 18	100	SSI, BiSS, SPI	5



KIT encoder systems

magnetic absolute

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	AS 25	24.5	up to 65.536 + 18 Bit	10 / 14 / 20	SSI, BiSS, SPI + 6 incr.	5 / 8 - 30
	AS 25 M	24.5	up to 65.536 + 18 Bit	10 / 14 / 20	SSI, BiSS, SPI + 6 incr.	5
	AS 50	50.7	up to 65.536 + 18 Bit	39.5 / 44.0	SSI, BiSS, SPI + 6 incr.	5 / 8 - 30
	AS 50 M	50.7	up to 65.536 + 18 Bit	39.5 / 44.0	SSI, BiSS, SPI + 6 incr.	5
	ASA 25	34.3	up to 65.536 + 18 Bit	11	SSI, BiSS, SPI + 6 incr.	5
	IMEA 64	64	up to 42 Bit	17,0 / 50,0 / 57,8	SSI, BiSS	5
	WEM 20	20	14 Bit	6	SSI, BiSS	5


KIT encoder systems

optical incremental

Product image	Product name	Outer diameter (mm)	Resolution (ppr)	Shaft diameter (mm)	Channels	Power supply (VDC)
	EBG 30	30	up to 102.400	10	6	5
	EBG 132	132	up to 500.000	100	6	5



Linear encoders

optical absolute

Product image	Product name	Measuring length (mm)	Step size (µm)	Channels	Power supply (VDC)
	ABG Head Linear	800	16	SSI, BiSS, SPI	5

Linear encoders

optical incremental

Product image	Product name	Measuring length (mm)	Step size (µm)	Channels	Power supply (VDC)
	EBG Head Linear	500	up to 0.8	6	5
	EBS Head Linear	200	20	6 Sin / Cos	5

Linear encoders

magnetic absolute

Product image	Product name	Measuring length (mm)	Step size (µm)	Channels	Power supply (VDC)
	PALM Head	80	312	SSI, BiSS, SPI	5




Production of encoder code wheels and encoder code strips

We manufacture both transmissive and reflective encoder code wheels made from high-quality polyester film and polycarbonate. Our production achieves resolutions of up to **1,270 lines per inch (lpi)** and extremely tight tolerances of **less than 1 µm** for the bar-to-window ratio (optical) and **< 10 µm** for mechanical specifications such as concentricity. These values are a clear reflection of the technological precision and quality standards of our production.


Whether you need a **prototype, small series,** or **large-scale production,** we manufacture according to your specifications. To simplify installation and broaden application possibilities, our code wheels can be enhanced with **double-sided adhesive films, stabilising discs, or custom hubs.**

Typical specifications of our encoder discs:

- **Resolution:** up to 1,270 lpi
- **Concentricity:** ≤ 0.015 mm
- **Eccentricity:** ≤ 0.0075 mm
- **Bar-to-window tolerance:** ± 0.002 mm
- **Pitch tolerance:** ± 0.001 mm

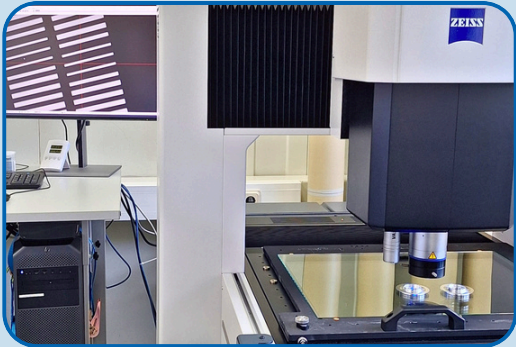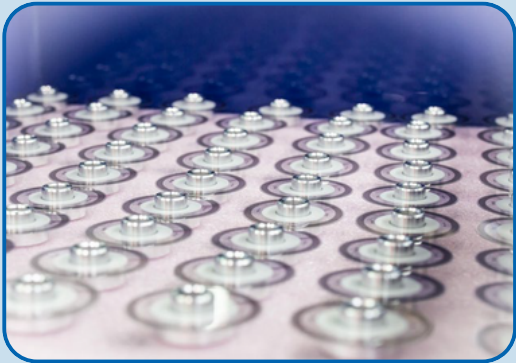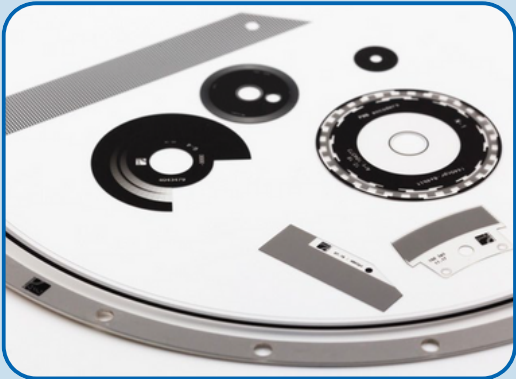


Customised solutions

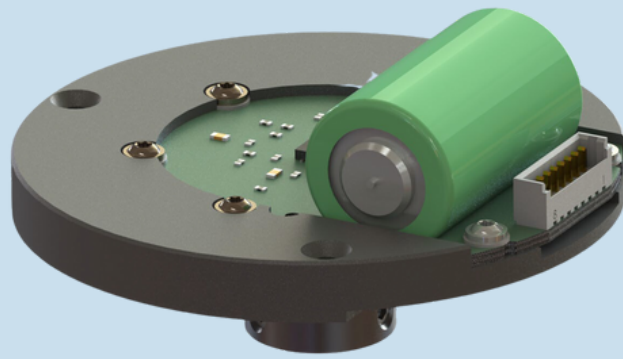

Customised encoders: Tailored Solutions & Dedicated Development

At PWB encoders GmbH, outstanding customer service means more than just answering questions — it's about actively supporting you in turning application-specific challenges into successful encoder solutions. Through close, collaborative dialogue, we help bring your ideas to life.

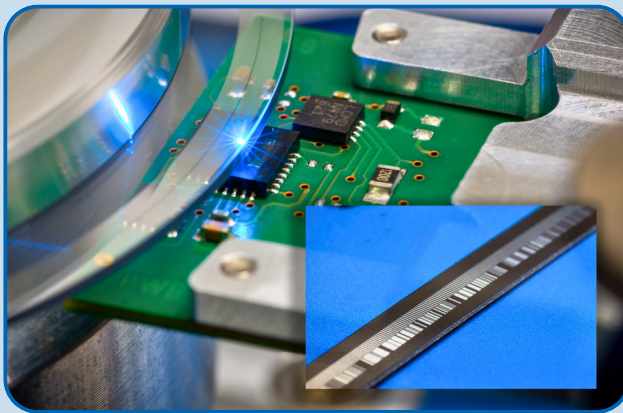

Our comprehensive service approach includes:


- In-depth needs and problem analysis
- Tailored solution design and product development
- Global logistics and reliable delivery
- After-sales and technical support
- Ongoing optimisation and continuous innovation

We don't just supply encoders — we help shape your success.

Our advantages:



In-house development and production



Customised solutions and development projects



Production in air-conditioned clean rooms



Owner of several patents and technical processes



Collegial company structure



REACH and RoHS compliant

Areas of application

Benefit from Our Comprehensive Industry Expertise

Our products are in use millions of times across a wide range of industries — from robotics and medical technology to optoelectronics. They are particularly well-suited for applications in handling systems, electric drives, and general mechanical and plant engineering. PWB encoders are trusted wherever precise position and speed measurement or accurate motion control is required.

Years of experience in these demanding application areas are the foundation for the outstanding performance and reliability of PWB products.


We currently offer solutions for the following sectors (a selection):




AGVs



Industrial robots



Gripping systems



Printing machines




Welding machines




Measuring systems



Winding machines



Surveying




Storage systems



Hexapod






Medical technology



Military Defence

Our highlights 25/26



Product image	Product name	Technology	Interface	Channels	Resolution	Outer diameter (mm)	Shaft diameter (mm)	Power supply (VDC)
	InCo 30	inductive	incremental	ABI	up to 8000 ppr	30	3.0 / 4.0 / 5.0	5
	InCo 40	inductive	incremental absolute singleturn	6 SSI, BiSS, SPI	8192 ppr 18 bit	47	6	5
	InCo 64	inductive	absolute (kit system)	SSI	20 bit	64	10	5
	InCo 75	inductive	incremental (analog)	Sin / Cos	3 Sin/Cos per revolution	75	30	5
	MEM 10 HR	magnetic	absolute singleturn	SSI, BiSS	21 bit	11	up to 8	3.3
	ASA 42 Y01	magnetic	absolute	SSI, BiSS + ABI, UVW	18 bit	42	up to 11	5
	OREA 74	optical	absolute singleturn	SSI, BiSS, SPI	18 bit	74	55	5

Benefit from Inductive Encoder Technology – Robust. Reliable. Precise.

Inductive measurement technology offers key advantages where precision and reliability are essential — even in the harshest environments:

- **Immune to contamination:** Unaffected by dust, oil or moisture
- **Insensitive to magnetic fields:** Ideal for use near brakes, motors, and other sources of electromagnetic interference
- **Extremely robust:** Shock- and vibration-resistant, with long service life
- **High precision:** Excellent resolution and repeatability, even under dynamic conditions
- **Maintenance-free:** No optical components, no sensitivity to wear

Typical applications include machine tools, medical devices, aerospace systems, cardan shafts, and defence technology — wherever absolute precision meets extreme environmental demands.

Notes:

[illegible]

YOUR CONTACT PERSONS



GERHARD VOCK

Managing Director

☎ +49 3691 72580 - 10

✉ vock@pwb-encoders.com



STEPHAN ROPPEL

Development Manager

☎ +49 3691 72580 - 23

✉ roppele@pwb-encoders.com



MARC SCHAFFER

Key Account Manager

☎ +49 3691 72580 - 12

✉ schaffer@pwb-encoders.com



MARIO OBERLÄNDER

Sales Manager

☎ +49 3691 72580 - 11

✉ oberlaender@pwb-encoders.com



www.pwb-encoders.com



Join our network!



Am Goldberg 2
99817 Eisenach
Thüringen | Deutschland



info@pwb-encoders.com