

Absolute Encoder Singleturn



Features

- Resolution: Singleturn: up to 8,192 (**13 Bit**) steps per revolution
- Interface: **SSI** (synchron serial interface) or **BiSS**® (bidirectional serial synchron)
- Maximum shaft diameter: **3.175 mm**
- Rotation speed: up to **10.000 rpm**




Description

The **MEM 16** is available as an absolute singleturn encoder in the execution of a kit system. It consists a magnetic hub, a housing unit (including the PCB) and a cable unit. The **MEM 16** is a reliable low cost hollow shaft encoder that can be fixed quickly and easily on different sizes of motor shafts.

The encoder is developed for absolute positioning applications, for brushless motors or servo motors and steppers. The **MEM 16** is a real time system for high speed applications and rough environments. The encoder is available with two different interfaces: SSI or BiSS ®. The transmission is based by two single-ended wires. Power supply and signals are provided by a 4 pin Molex connector.

Dimensions

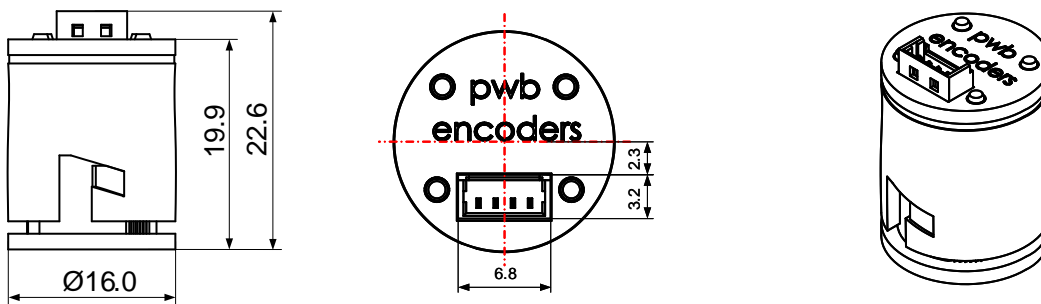

Main characteristics

- Absolute rotary encoder
- Singleturn execution
- Magnetic sensing
- Hollow shaft encoder
- Power supply: 5 VDC.
- High performance in compact size
- Small size: 16.0 mm diameter x 22.6 mm length
- Robust plastic housing
- Maximum shaft diameter 3,17 mm (1/8")
- Quick and easy assembly
- Operating temperature: -30 °C to 85 °C
- Compliant EU-directive 2011/65/EG (RoHS)

Recommended operating conditions

Electrical characteristics are only effective for the range of the operating temperatures.
Typical values at 25 °C and $V_{CC} = 5$ VDC.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Supply voltage	U_B	4.5	5.0	5.5	V_{DC}	
Supply current	I_{UB}	40	60	80	mA	no load
Reverse polarity protection	U_B	-6.0		0	V_{DC}	
Start up time	t_T			2	ms	
Absolute accuracy			+/- 0.8		°	(after calibration via SW)
Relative accuracy			+/- 1,5		LSB	(after calibration via SW)
Rotation speed	RPM			10,000	U/min	
Acceleration	α_{max}			40	10^3°/s^2	
ESD voltage	U_{ESD}			2	kV	discharged over 1,5k Ω
SSI / BiSS						
Clock frequency	f	80		10000	kHz	
High level output voltage	V_{OH}	2.0	3.0	5.5	V_{DC}	$R_L = 120\Omega$
Low level output voltage	V_{OL}			0.8	V_{DC}	$R_L = 120\Omega$
High level input voltage	V_{IH}	2.0		5.5	V_{DC}	
Low level input voltage	V_{IL}			0.8	V_{DC}	
Output current per channel	I_{out}	-1.0	30	50	mA	overload protection
Scan ratio of T		40		50 60	%	
Monoflop time	t_m		20 + T/2		μs	adaptive Encoder Timeout
BiSS						
CRC Polynomial			0x43		hex	$x^6 + x^1 + x^0$
CRC Start Value			0x0000		hex	
CRC Bits			6			
CDM						inverted
Environment						
Operating temperature	T_A	-30	25	85	°C	optional 100°C
Storage temperature	T_S	-40		85	°C	
Humidity exposure				90	%RH	not condensing
Vibration				2000	Hz	20 g


The angular accuracy of the datasheet can only be guaranteed by a single calibration after the mechanical assembly (with the PWB encoders Software and the USB converter box).

Mechanical specifications

Parameter	Value	Tolerance	Unit
Outer dimensions connector version	Ø16.0 x 22.6	-	mm
Shaft diameter \varnothing_w	1.5 / 2.0 / 2.3 / 2.5 / 3.0 / 3.175	±0.01	mm
Required shaft length L_w	9.5	+ 2.0	mm
Max. allowable axial shaft play of motor	0.3	-	mm
Max. allowable radial shaft play of motor	0.025	-	mm
Mounting screw size (DIN 84)	M1.6	-	-
Tightening torque of the screws	15	-5	Ncm
Pitch circle diameter \varnothing_c	11.0	±1.0	mm
Flange bore diameter diameter \varnothing_z	6.02	+0.05	mm
Mounting boss diameter \varnothing_m	6.02	-0.03	mm
Max. mounting boss height h_z	1.5	-0.1	mm
Mating connector (Molex)	contact 4x 50079-8000 housing 1x 51021-0400	-	-
Total weight	4	-	g
Moment of inertia of the hub with the code wheel	2.35	±1.0	gmm ²
Protection grade according to DIN 40500	IP50	-	-

Mounting considerations:


The MEM 16 encoder is designed to self align by using a mounting boss. The drawing shows the configuration of the mounting boss along with the location of the mounting screw holes. Shaft diameter and tolerances are given in the above mentioned chart.

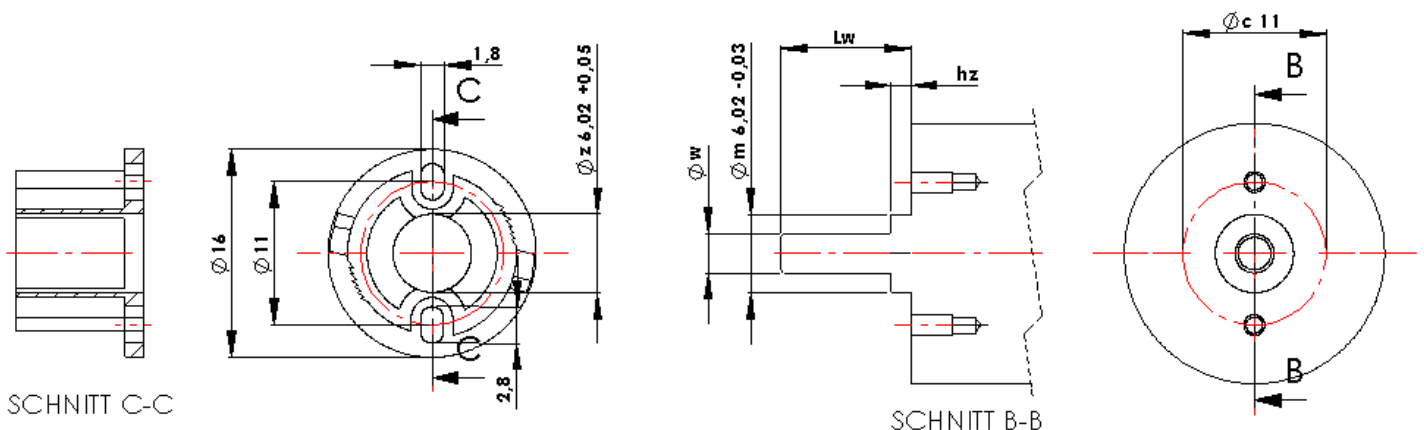

Interface:


Data transfer: SSI

Gray-Code

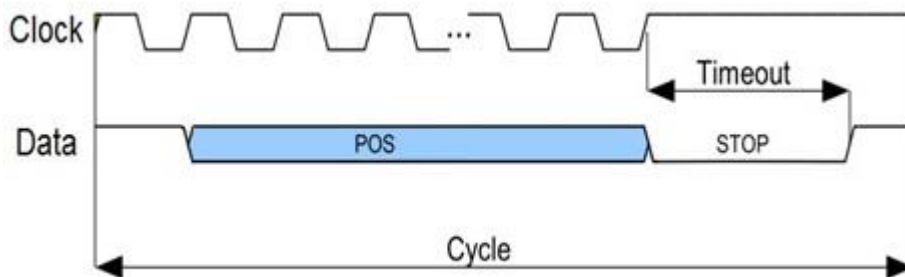

Data transfer: BiSS (C-Mode)

Binary-Code

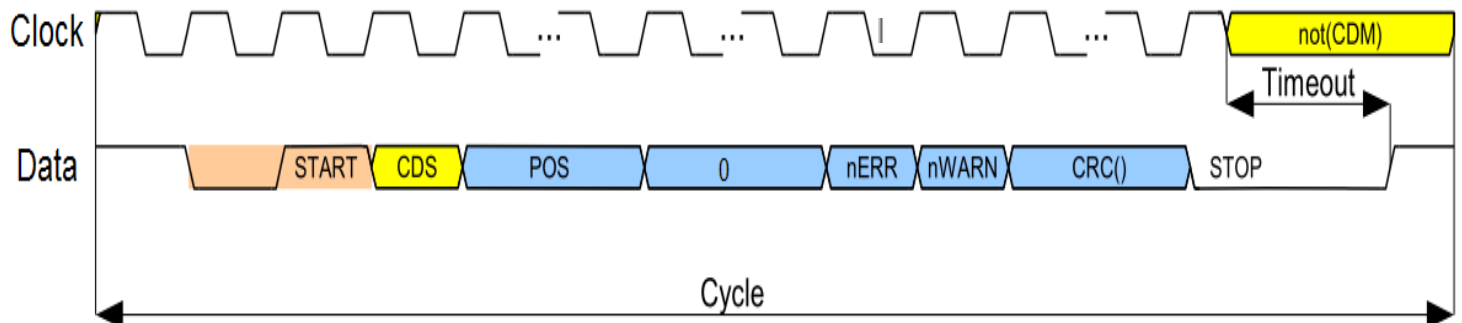

0:
These are additional bits to refill the singeturn bit length to 12 bit respectively 16 bit. The number of Zero-bits is depended of the Ordering code (see below). The value of these bits is low.


Example:

Ordering code:	MEM16 - B 09 -=>	... + 9 Position bits + 3 x 0 bits + ...
	MEM16 - B 10 -=>	... + 10 Position bits + 2 x 0 bits + ...
	MEM16 - B 11 -=>	... + 11 Position bits + 1 x 0 bits + ...
	MEM16 - B 12 -=>	... + 12 Position bits + ...
	MEM16 - B 13 -=>	... + 13 Position bits + 3 x 0 bits + ...

For a detailed description of the protocol, see separate interface specification.

Electrical interface

Rotation direction clockwise (count up)

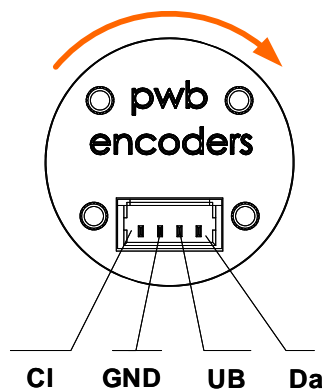

Pin-out description

Connector Pin	Connector Signal	Cable Wire color
1	Clock	red
2	GND	yellow
3	UB	black
4	Data	purple

Preset and rotation direction are programmable by a BiSS command.

Error monitoring and Error Reset can also be controlled and executed by command using BiSS interface.

For communication with the MEM16 in SSI or BiSS version, a USB converter box is available from PWB encoders. The software can be downloaded from the website. This can help for the first use and for visualization of the position data. It is not necessary for operation in the customer application with the customer control.

The angular accuracy of the datasheet can only be guaranteed by a single calibration after the mechanical assembly (with the Software and the USB converter box).

Patents: U.S 5,828,047 ; U.S 5,508,088 ; U.S 5,859,425 ; U.S 6,462,442

IMPORTANT NOTICE

The encoder is so designed that it may be assembled only one time, otherwise the guarantee will be voided.


The guarantee will be voided by misuse, accident, modification, unsuitable physical or operating environment, operation in other than the specified operating environment, or failure caused by a product for which **PWB encoders GmbH** is not responsible.

PWB encoders GmbH reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services also datasheets at any time.

Ordering information

Ordering code:

MEM 16 - X - XX - XX - X - X - XX

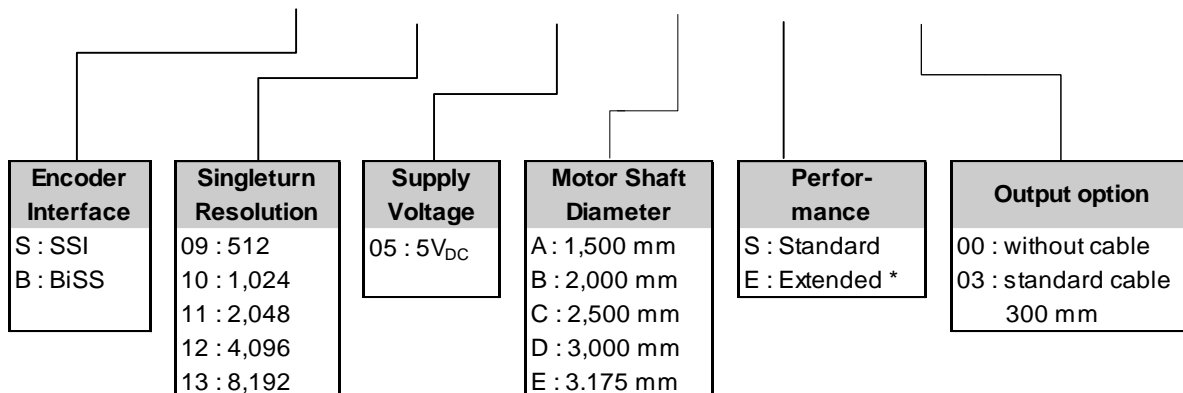

* customer version

SSI only with gray code
BiSS only with binary code

Selectable and required accessories see page 10:

- cable 300 mm length (UL1061 / AWG28)
- centering and assembly gauge for different motor shafts
- adapter plates for different motors
- fastening screws DIN 84 M1.6x3 or M1.6x4


PWB encoders GmbH RESTRICTED

THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS PROPERTY OF PWB encoders GmbH AND MAY NOT BE DISCLOSED OR DUPLICATED FOR OTHERS EXCEPT AS AUTHORIZED BY PWB encoders GmbH

INFORMATION CONTAINED IN THIS PUBLICATION MAY BE SUPERSEDED BY UPDATES. IT IS YOUR RESPONSIBILITY TO ENSURE THAT YOUR APPLICATION MEETS WITH YOUR SPECIFICATIONS.

MEM 16 MOUNTING INSTRUCTION

1




Set the base plate onto the motor

2



Align the base plate to the motor shaft by using the centering gauge

3




Afterwards fix the base plate to the motor flange using two screws

4




Remove the centering gauge

5

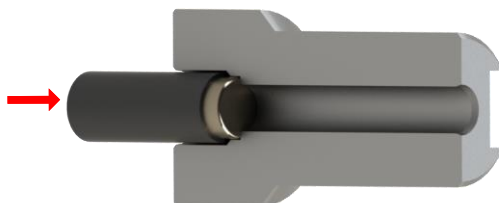


Set the hub with magnet into the centering gauge

6

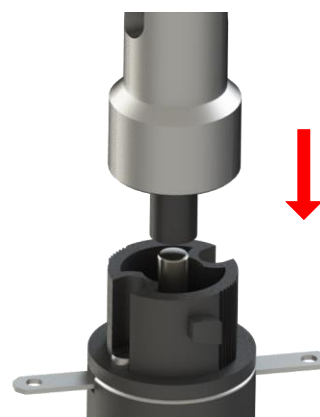


Press the hub with magnet onto the motor shaft by the centering gauge


MEM 16 MOUNTING INSTRUCTION
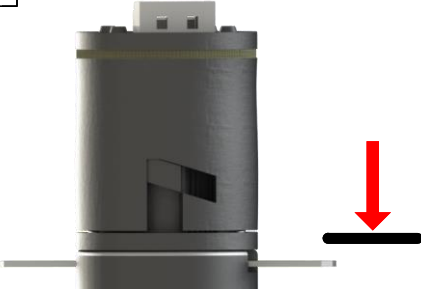
<p>7</p>  <p>Press the centering gauge down to the final position</p>	<p>8</p>  <p>Afterwards remove the centering gauge</p>
<p>9</p>  <p>Align the housing to the base plate, slide the housing onto the base plate</p>	<p>10</p>  <p>Press the housing into the final position</p>
<p>11</p>  <p>Turn the housing into its final position, the encoder is now ready for use</p>	<p>12</p> <p>WARNING</p>  <p>Do not rotate and pull out the encoder after assembly or when it is in operation.</p>

Available accessories

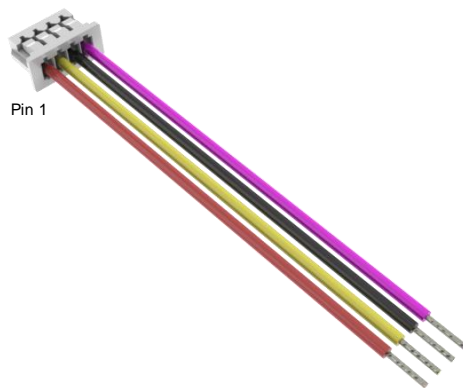

Standard cable length 300 mm
(UL 1061 / AWG 28)



Centering and assembly gauge for centering
the base plate on the motor flange or an
adapter plate and also positioning the magnet



Customized adapter plate



Screws DIN84 M1.6 X 3 or M1.6 X 4

ESD Warning: Normal handling precautions should be taken to avoid static discharge damage to the sensor.