


Product	Outer diameter mm	Resolution cpr	Shaft diameter mm	Channels	Power supply V
MEM 22 AE	22	12 Bit	2,0 - 8,0	2 / 3	5
AS 25 M	24,5	to 65.536 crp, 18 Bit	14,0 - 20,0	4 + 3	5 / 8 - 30
AS 25	24,5	to 65.536 crp, 18 Bit	14,0 - 20,1	4 + 3	5 / 8 - 30
AS 50 M	50,7	to 65.536 crp, 18 Bit	39,5 - 44,0	4 + 3	5 / 8 - 30
AS 50	50,7	to 65.536 crp, 18 Bit	39,5 - 44,1	4 + 3	5 / 8 - 30
ASA 25	30	to 65.536 crp, 18 Bit	11,0	4 + 3	5
MEM 16 M	16	14 Bit + 24 Bit	1,5 - 3,175	2	5
MEM 22 M	22	14 Bit + 24 Bit	2,0 - 8,0	4	5
AEM 30	31	14 Bit + 24 Bit	4,0 - 6,35	4	5 / 8-24




How to get here

PWB encoders GmbH
 Am Goldberg 2 | 99817 Eisenach | Germany
 Phone: +49-3691-72580-0 · Fax: +49-3691-72580-29
 info@pwb-encoders.com | www.pwb-encoders.com

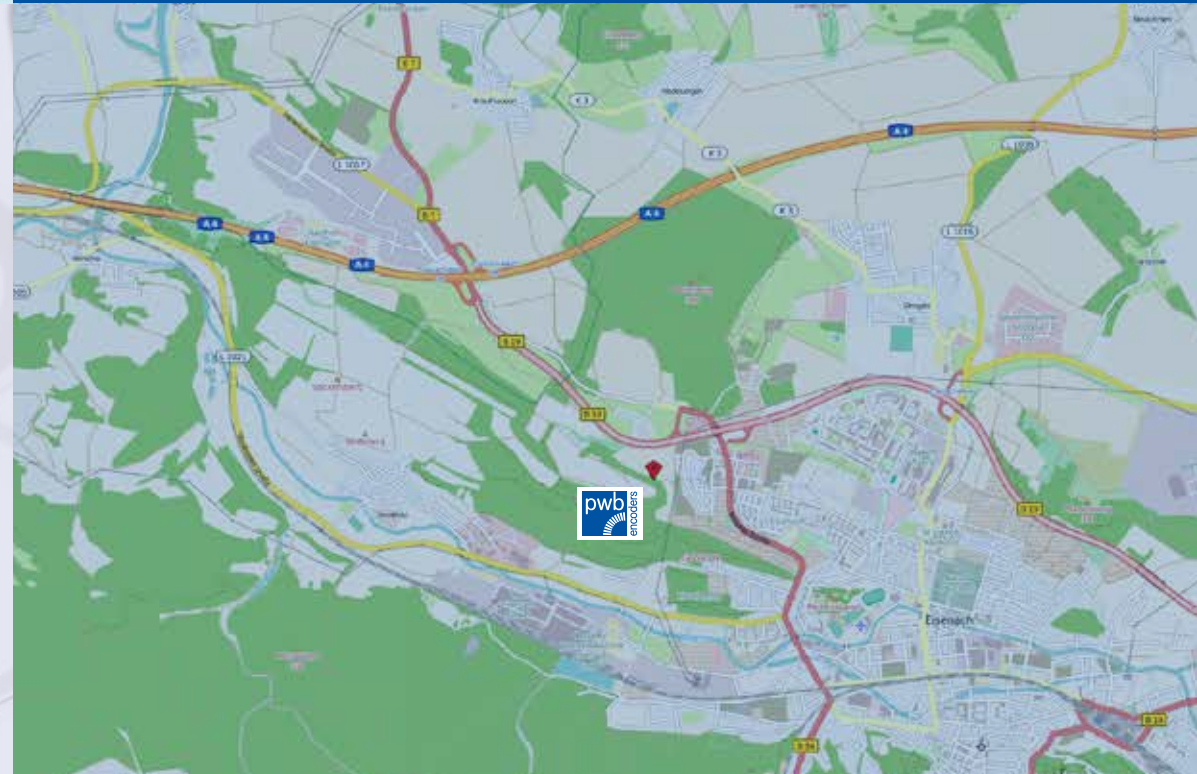

Your contact person

Gerhard Vock General Manager Phone: +49-3691-72580-10 vock@pwb-encoders.com	Christoph Hesse Area Sales Manager Phone: +49-160-1149968 hesse@pwb-encoders.com	Mario Oberländer Sales Manager Phone: +49-3691-72580-11 oberlaender@pwb-encoders.com
--	---	---

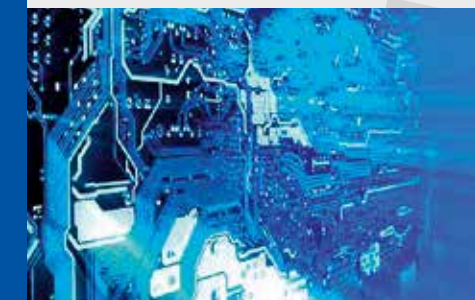

pwb encoders GmbH
 mini encoder



Product Overview

optical incremental

Product	Outer diameter mm	Resolution cpr	Shaft diameter mm	Channels	Power supply V
ME 16	16	36 - 230	1,5 - 3,175	2	5
ME 22	22	1 - 360	1,5 - 9,52	2 / 3	5
MEC 22	22	500 - 2.048	1,5 - 9,52	2 / 3	5
MEC 22 HR	22	2.000 - 8.192	4,0 - 8,0	2 / 3	5
ME 22 S	22	1 - 360	4,0 / 6,0	2	5
EBG 200		100.000	to 200	2 / 3	5
MES 25 Sinus	25	250 / 256	4,0 - 6,0	3	5



optical incremental

Product	Outer diameter mm	Resolution cpr	Shaft diameter mm	Channels	Power supply V
AE 30	31	100 - 5.000	2,0 - 8,0	2 / 3	5
AE 30 F	31	100 - 5.000	2,0 - 8,0	2 / 3	5 / 8 - 30
AE 30 VX	31	100 - 5.000	2,0 - 8,0	4	8 - 30
MEHR 25 H	25	to 12.000	4,0 - 6,0	2 / 3	5
MEHR 25 S	25	to 12.000	4,0 - 6,0	2 / 3	5
MEHR 25 Y01	25	256 - 4.098	6,0	3	5



magnetic incremental

Product	Outer diameter mm	Resolution cpr	Shaft diameter mm	Channels	Power supply V
MEM 16 IE	16	1 - 1.024	1,5 - 3,175	2	5
MEM 20	22	64	3,0	2	5
MEM 22 IE	22	1 - 1.024	2,0 - 8,0	2 / 3	5 / 8 - 30
MEM 25 C	25	1 - 1.024	2,0 - 6,0	3	5 / 8 - 30
MEM 25 K	25	1 - 1.024	2,0 - 6,0	3	5 / 8 - 30
MEM 22 AE	22	12 Bit	2,0 - 8,0	2 / 3	5

